

Monocrystalline 108 cells

TRITON




M10 182
9BB / 10BB/ 11BB



Guaranteed positive output
selection 0 ~ +5 Wp
by single measuring



3.2 mm anti-reflective glass



BLACK | WHITE




Maximum stability through
aluminium soft grip frame



Maximum 5400 Pa snow load



15 years manufacturer's warranty
25 years linear performance guarantee

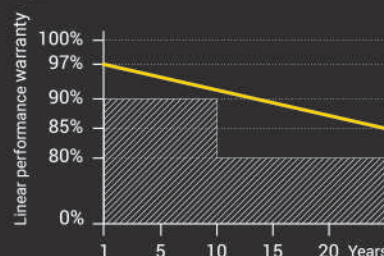

OUTPUT: 415 - 420 WATT

TRITON monocrystalline 108 halfcut cell series with multibusbar M10 cells is the newest top efficiency series. Halfcut cells are split in two halves to improve the performance and they are arranged in two parallel strings for a better management of shading. Featuring a 35 mm black anodized aluminium frame, TRITON series can combine visual attractiveness to conversion efficiency over 21 %.

EX3[®]

power for a better world


STC	A-HCM415/108	A-HCM420/108
Maximum Power (Pmax) (W)	415	420
Open Circuit Voltage (Voc) (V)	37.86	38.12
Short Circuit Current (Isc) (A)	13.79	13.86
Voltage at Maximum Power (Vmpp) (V)	31.80	32.02
Current at Maximum Power (Impp) (A)	13.06	13.13
Module Efficiency (%)	21.25	21.50

STC (Standard Testing Condition): Irradiance 1000 W/m², Cell Temperature 25 °C, Spectra at AM 1.5; Test uncertainty tolerance for Pmax, Voc and Isc: ±3 %

Electrical Parameters at NOCT	A-HCM415/108	A-HCM420/108
Maximum Power (Pmax) (W)	308	311
Open Circuit Voltage (Voc) (V)	34.98	35.23
Short Circuit Current (Isc) (A)	11.14	11.20
Voltage at Maximum Power (Vmpp) (V)	29.20	29.40
Current at Maximum Power (Impp) (A)	10.55	10.61

NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², Ambient Temperature 20 °C, Spectra at AM 1.5, Wind at 1 m/s

Temperature Characteristics		Specifications	
Pmax Temperature Coefficients (W / °C)	-0.35 % / °C	Cell Type	Mono M10 182 9BB / 10BB/ 11BB
Voc Temperature Coefficients (V / °C)	-0.27 % / °C	Weight	21 kg ±3 %
Isc Temperature Coefficients (A / °C)	+0.04 % / °C	Dimensions	1722x1134x35 mm (±0.7 %)
NMOT Nominal Operating Cell Temperature (°C)	45 ±2 °C	Cable Cross Section Size	4 mm ² , cable approx 110 cm, QC4 compatible
Operating Conditions		No. of cells	108 (6x18)
Operating Module Temperature	-40 °C ~ +85 °C	Junction Box	IP67, 3 diodes
Maximum System Voltage	1500 V	Frame	Black anodized aluminium
Maximum Series Fuse Rating	25 A	Front glass	3.2 mm high transmission, low iron, tempered glass
Selection	0 ~ +5 W	Packing Details	
Nominal Front Load	5400 Pa	Container Type	40'HC
Nominal Rear Load	2400 Pa	No. of Pallets	26
Class of Protection	II	Pieces per Pallet	31
		Total quantity of modules	806

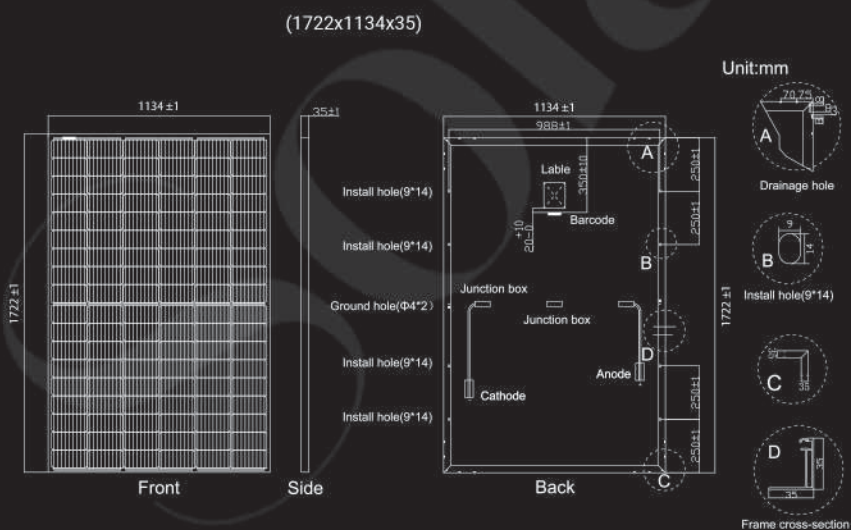

A-HCM415/108

